




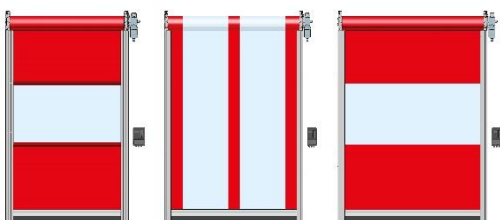



Curtain Colours

-  5010/537
-  3000/356
-  1021/101
-  2009/205
-  7035/729



Full

Strip

Transilon

TECHNICAL DATA		E140C
Door Type	Roll Up	•
Sizes	Max Width-mm	4000
	Max Height-mm	4500
Application	Internal	•
Wind class EN12424-TUV Tested	Full Curtain	Class 1
	Strip Model Curtain	Class 1
	Transilon Curtain	Class 3
Working cycle	a day/24 h	350
Max door speed	m/s*optional with FU-depends on door sizes	1,5
	Average door speed	Opening m/s
Control unit	Closing m/s	0,7
	Standard speed	•
Door frame	With frequency controller (soft start-soft stop)	o
	Galvanized steel-2 mm	•
	Stainless steel 304L V2A	o
Door curtain	Powder coated paint	o
	Spring steel wind bars with wind nuts	•
	Windnuts/Transilon Curtain	•
Anticrash	Windnuts/Strip Curtain	•
	1 mm pvc fabric	•
	2 mm clear pvc with vertical strip	o
	2 mm monofilament transilon pvc	o
	2 mm clear pvc vision panel	•
Manual release	Aluminium Bottom profile with EPDM rubber	•
	Crash protective safety edge /WL switch	o
Counterbalance	For manual openings	Balance weight
Emergency opening	Semi-Automatic	•
	Photocell-Thru Beam	•
	Light curtain 2000/2500 mm	o
Safety devices	Wireless bottom safety edge	o
	Galvanized steel	o
	Stainless steel	o
Top cover	Powder coated	o
	Galvanized steel	o
Motor cover	Stainless steel	o
	Powder coated	o
•:standard o:optional -:not possible		